

# Зарядное устройство для СВИНЦОВО-КИСЛОТНЫХ АККУМУЛЯТОРОВ EPS150W

## Технические характеристики

### По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48

Россия +7(495)268-04-70

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73

Киргизия +996(312)-96-26-47

Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Саранск (8342)22-96-24  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35

Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35  
Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93



Dimensions: 150(D)x153(W)x59(H) mm

### Features

- High power density
- Universal input range
- Convection cooled
- RoHS compliance
- 3 year warranty
- Great reliability
- DIN rail / Wall bracket mounting solution
- Over voltage protection
- Overload protection
- Short circuit protection
- Reverse polarity protection
- Built-in MCU

### Safety Standards



EN 60950 (Marking)

### EMC Standards

EN55011	Class B
EN55022	Class B
EN61000-4-2	Level 3
EN61000-4-3	Level 3
EN61000-4-4	Level 3
EN61000-4-5	Level 3
EN61000-4-6	Level 3
EN61000-4-8	Level 3
EN61000-4-11	Level 3

### Model List

Model	Charging Voltage		Charging current	Line Reg.	Load Reg.	Efficiency	Over Voltage Protection
	Boost	Float					
EPS1210	14.7VDC	13.8VDC	10A Max.	±1%	±1%	82%	15~17VDC
EPS2405	29.4VDC	27.6VDC	5.0A Max.	±1%	±1%	83%	32~35VDC
EPS4803	58.8VDC	55.2VDC	3.0A Max.	±1%	±1%	84%	64~70VDC

- **NOTE:** 1. Line regulation is measured from low line to high line at rated load.  
 2. Load regulation is measured from 20% to 100% of rated load at 230VAC input.  
 3. Efficiency is measured at rated load and 230VAC input.


### Specification

General		
<b>Switching Frequency</b>		85k Hz
<b>Isolation Voltage</b>	Input-Output	3000 VAC/4242 VDC
	Input-FG	1500 VAC/2121 VDC
	Output-FG	500 VAC/710 VDC
<b>Isolation Resistance</b>		100MΩ when Input-Output @500VDC
<b>Operating Temperature</b>		-40°C~40°C ambient
<b>Storage Temperature</b>		-40°C to +85°C
<b>Relative Humidity</b>		5%~95% RH, Non-condensing.
<b>Temperature Coefficient</b>		±0.04% of output voltage per °C
<b>MTBF</b>		60,000hrs Min. Per MIL-HDBK-217F, 25°C GB
<b>Altitude During Operation</b>		2000m
<b>Installation position</b>		Vertical
<b>Vibration</b>		Random vibration, 10~500Hz, 3 axes
Input		
<b>Input Voltage</b>		100~240VAC/120~370VDC
<b>Input Frequency</b>		47~63 Hz
<b>Inrush Current (cold start)</b>		22A/115VAC 44A/230VAC
<b>Rated Input Current</b>		4.0A Max., Vi=100~240VAC
<b>Leakage Current</b>		Input-output 0.3mA, Input-FG 3.5mA
Output		
<b>Line Current Regulation</b>		±1%, measuring from low line to high line at rated load.
<b>Load Current Regulation</b>		±1%, measuring from 20% to 100% of rated load at 230VAC input.
<b>Rated Continuous Loading</b>		See model list
<b>Turn On Time</b>		1500mS
<b>Efficiency</b>		See model list, measuring at rated load and 230VAC input.
Protection		
<b>Input Fuse</b>		3.15A/250V
<b>Internal Surge Load Protection</b>		Varistor, IEC 61000-4-5
<b>Degree of Protection</b>		IP64
<b>Short Circuit Protection</b>		Auto recovery
<b>Over Voltage Protection</b>		Auto recovery
<b>Rated Over Load Protection</b>		100%
<b>Overload protection</b>		Current limited

# EPS 150W Series


150Watts, Lead-Acid Battery Charger

## Charging Curve

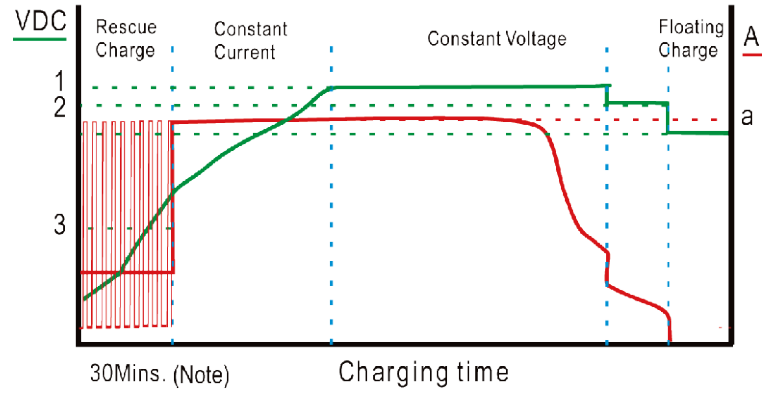

Type Code	12V	24V	48V
a(A)	10.0	5.0	3.0
b(A)	14.7	29.4	58.8
1(VDC)	13.8	27.6	55.2
2(VDC)	8.0	16.0	32.0

## Mechanical Details

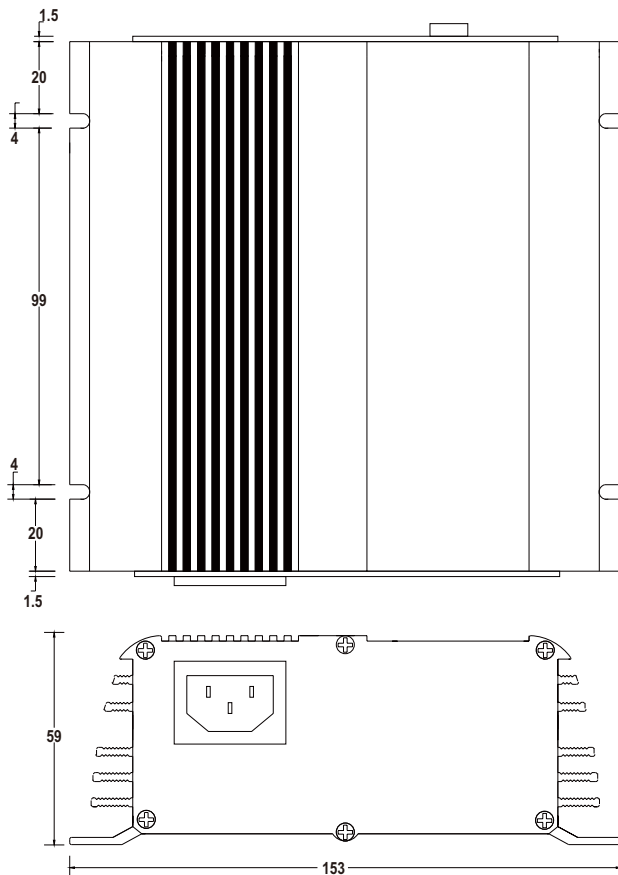

Dimensions: 150(D)x153(W)59(H)mm  
 Material: Aluminum(Extrusion)  
 Input Cable: 1.5m power cord  
 DC output: 1.2m, 14AWG x2 + alligator clip  
 Package: 10pcs/Ctn

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Россия +7(495)268-04-70

Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Саранск (8342)22-96-24  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35  
Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93